

FIG. 1 is a perspective view of a device 10, including a base 12, a support 14, and a top 16. The base 12 includes a plurality of openings 20, 22, 24, and 26. The support 14 includes a plurality of openings 28. The top 16 includes a plurality of openings 28. The device 10 is configured to receive a fluid flow through the openings 20, 22, 24, and 26, and the openings 28.

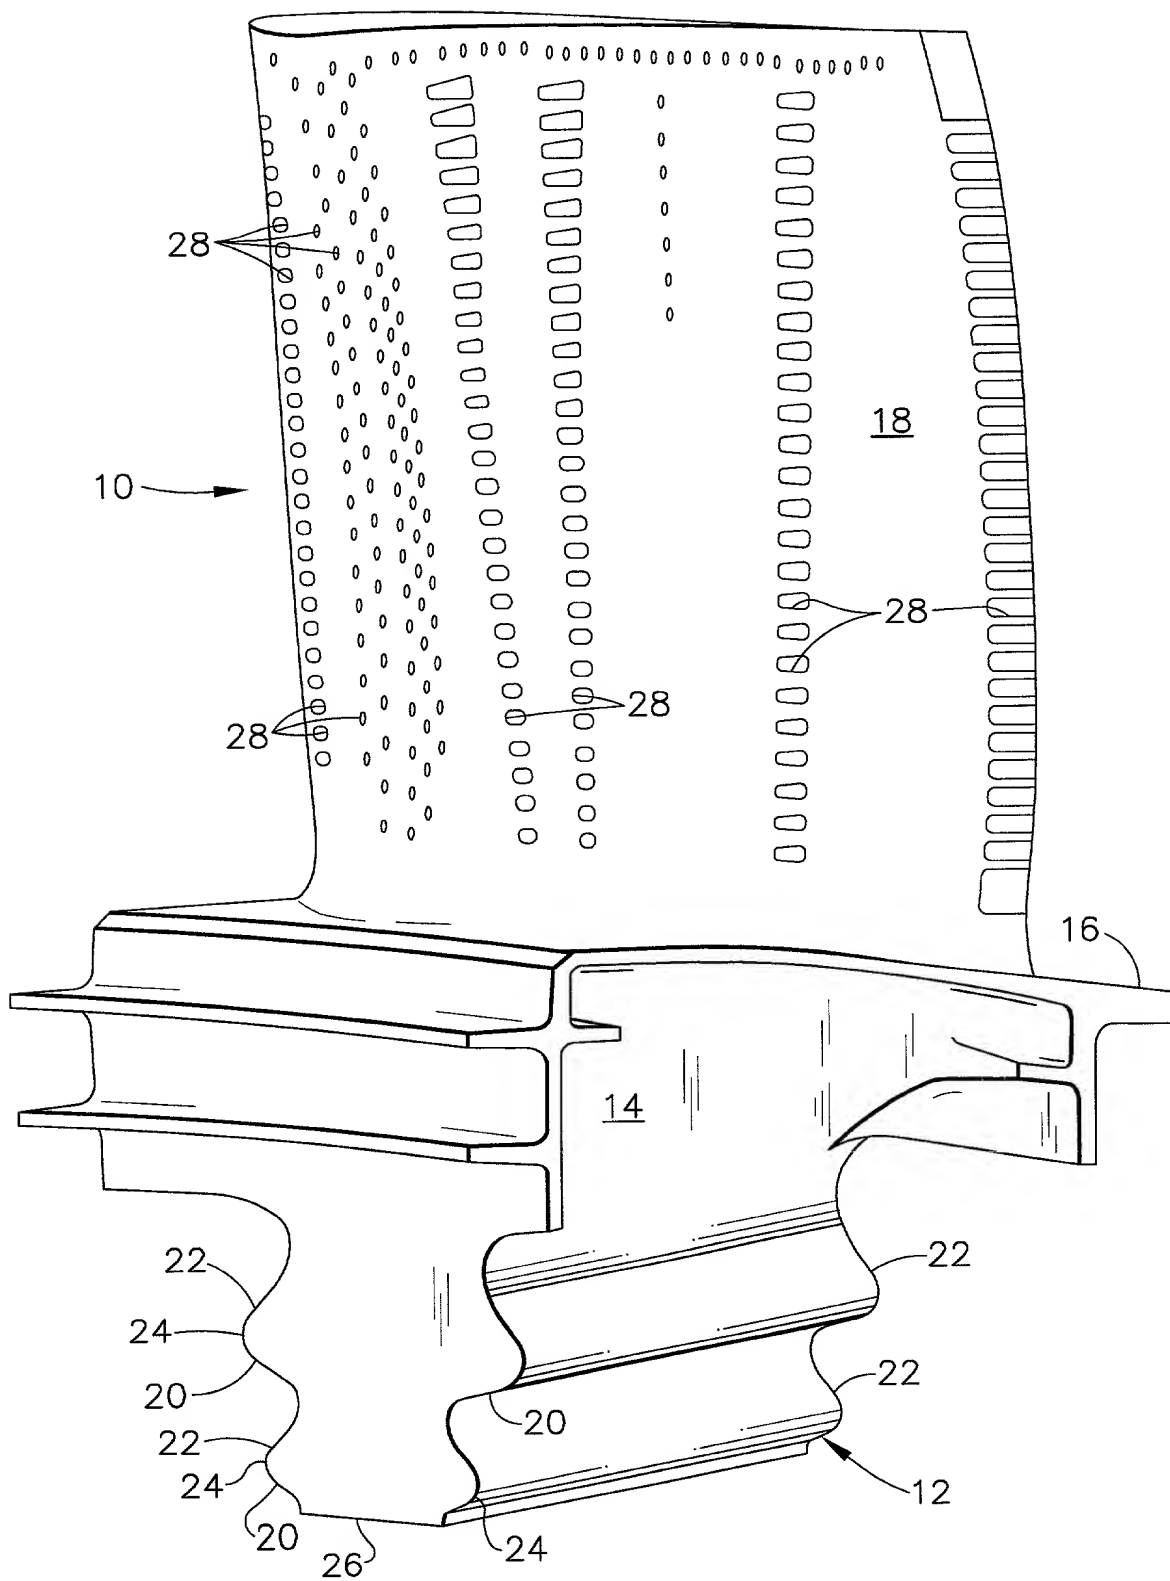


FIG. 1

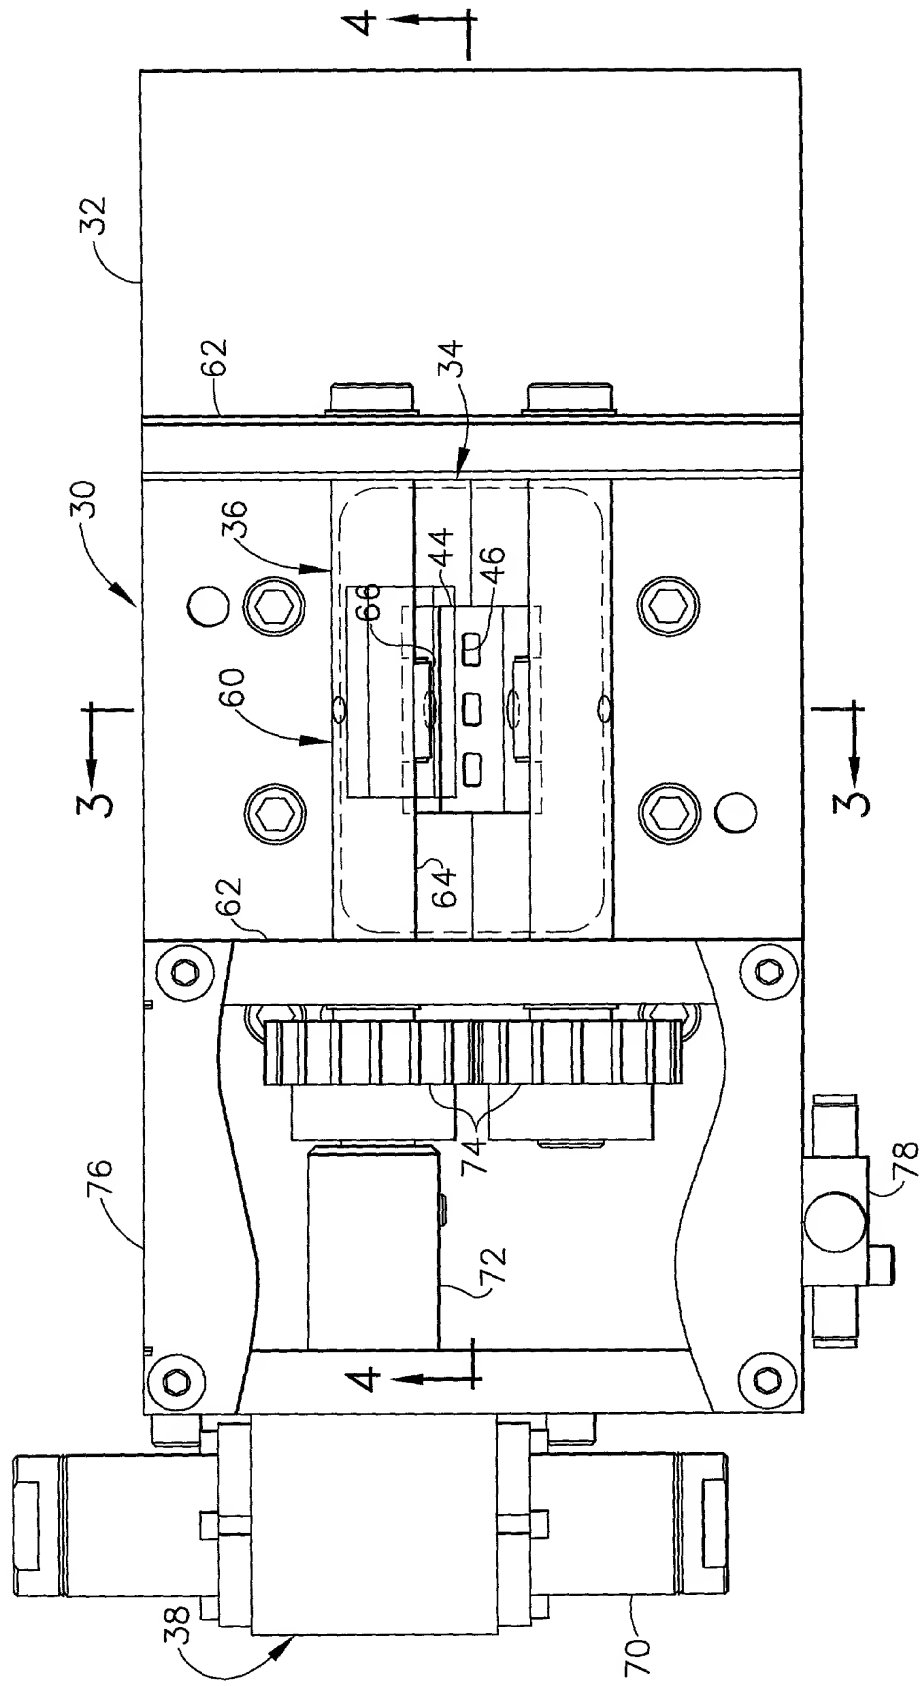


FIG. 2

FIG. 3 is a cross-sectional view of a device 30, showing a housing 32 with a central opening 40. A plug 42 is positioned within the opening 40, and a plug 44 is positioned within a side opening 46. The plug 42 is secured by a screw 48, and the plug 44 is secured by a screw 50. The device 30 also includes a top cover 70 and a bottom cover 78.

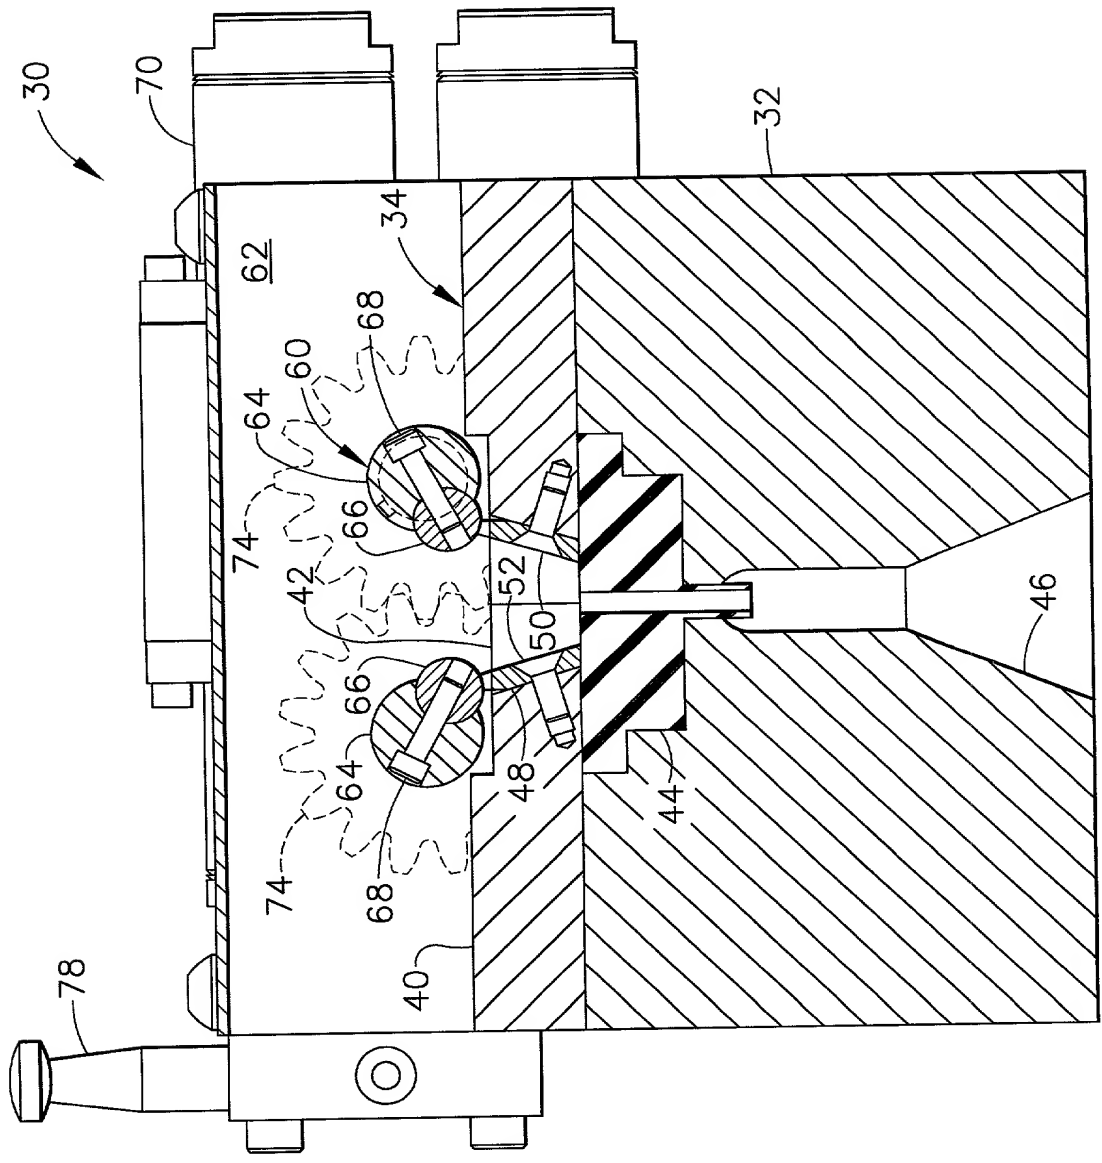


FIG. 3

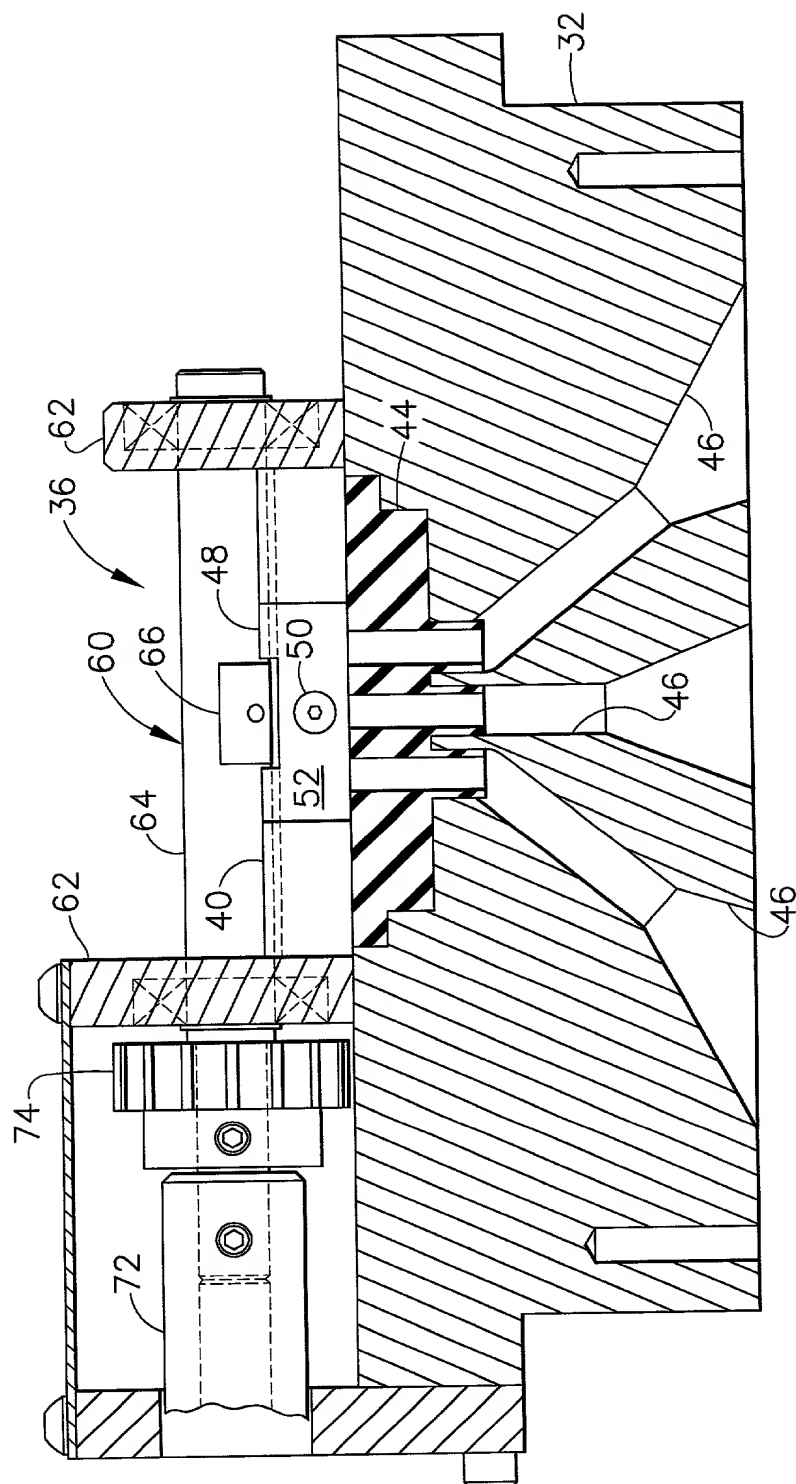


FIG. 4



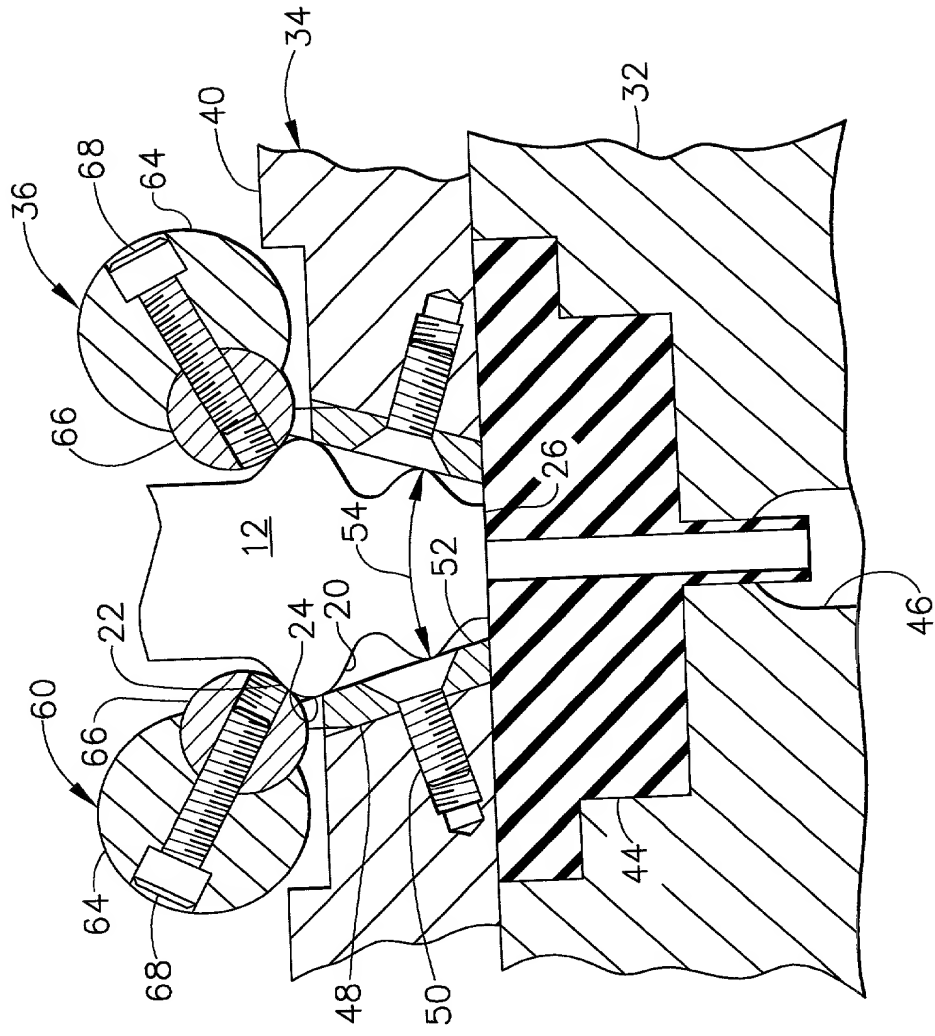


FIG. 6

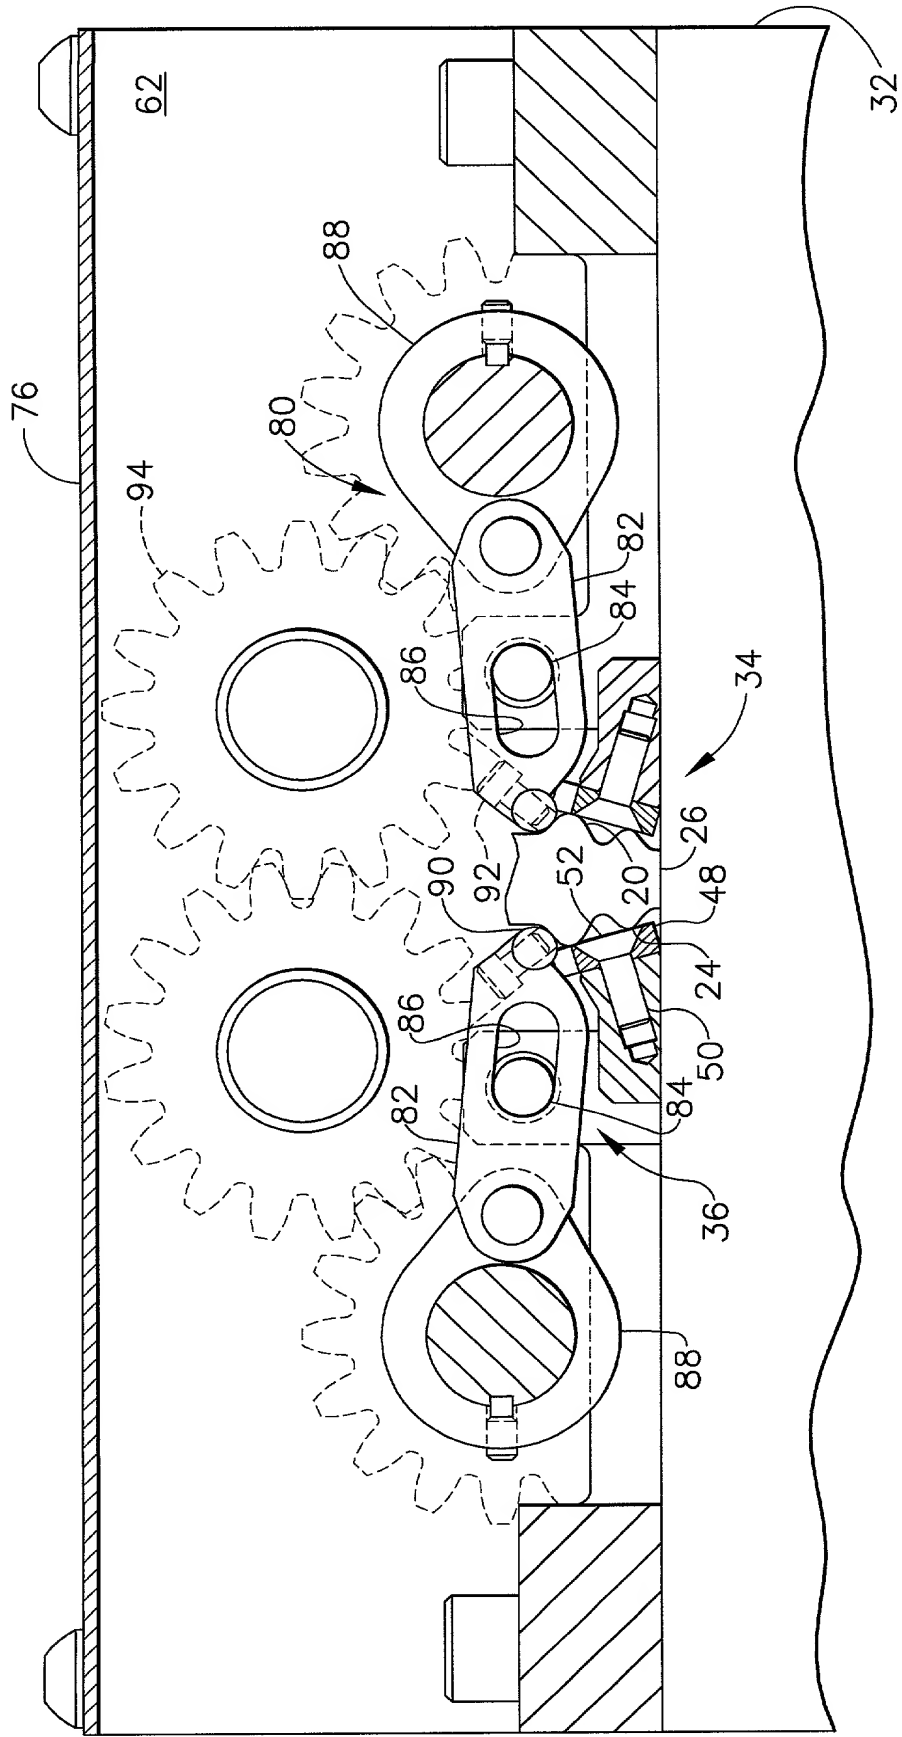


FIG. 7